

**PK 8.501 SLD 1 | PK 9.001 SLD 3
PK 8.501 SLD 3 | PK 9.501 SLD 5**

**LIGHTWEIGHT DESIGN
OFFERS AN OPTIMIZED
MOUNTING CONCEPT**


LIFETIME EXCELLENCE




PK 8.501 SLD 1 (NON-CE)

PERFECT DIMENSIONS


STD

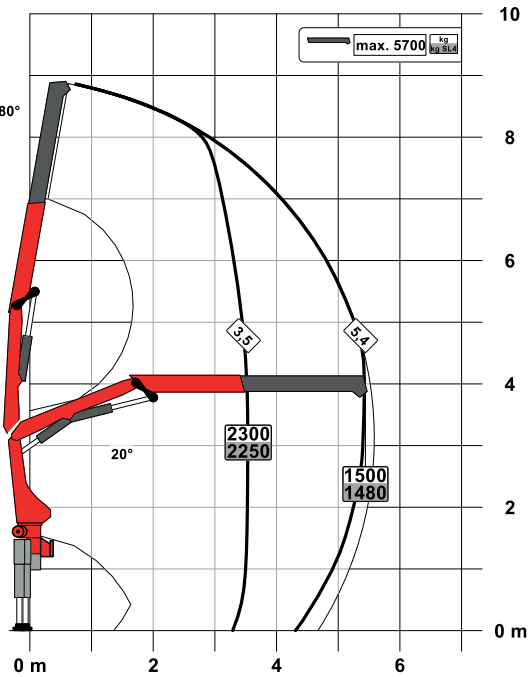


A

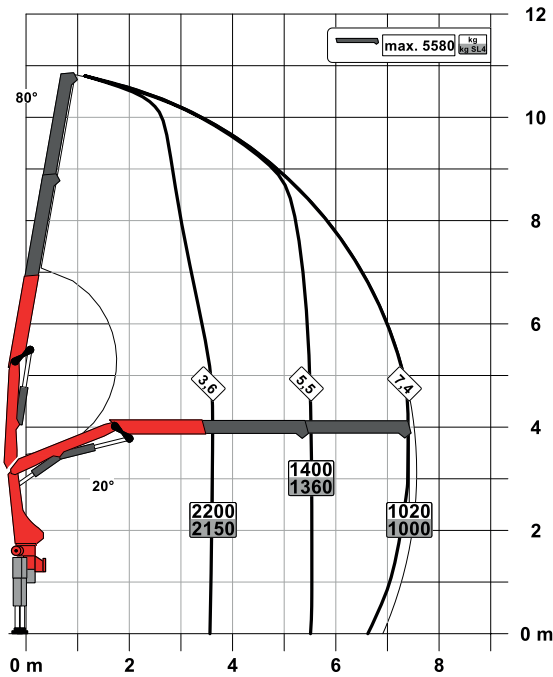

C

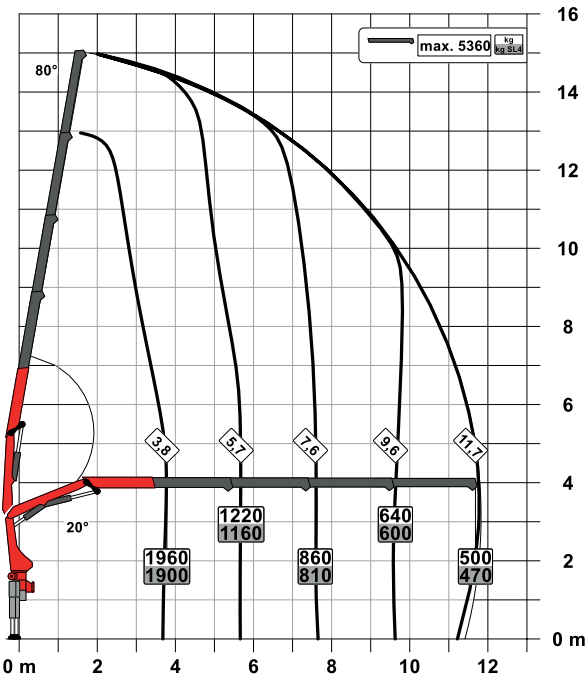

B

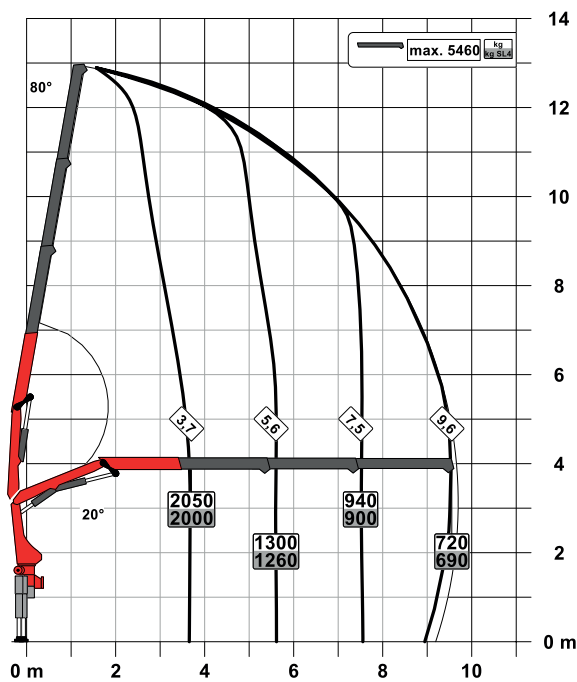

SLD 1 (NON-CE)

- Single Link
- Optional:
 - Overload protection OSK
 - Top seat control
 - High stand control
 - Radio remote control
- NON-CE model

Technical specifications


EN 12999 HC1 HD4/S2

Max. lifting moment	8.1 mt/79.6 kNm	58710 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	11.8 m	38' 9"
Max. manual outreach	15.8 m	51' 10"
Slewing angle	400°	
Slewing torque	1.0 mt/9.8 kNm	7230 ft.lb
Stabiliser spread (std./max.)	3.2 m/ 5.6 m	10' 6"/ 18' 4"
Fitting space required (std.)	0.70 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	from 25 l/min to 35 l/min	6.6 US gpm 9.2 US gpm
Dead weight (std.)	1050 kg	2320 lb


PK 9.001 SLD 3 (NON-CE)

PERFECT DIMENSIONS


STD

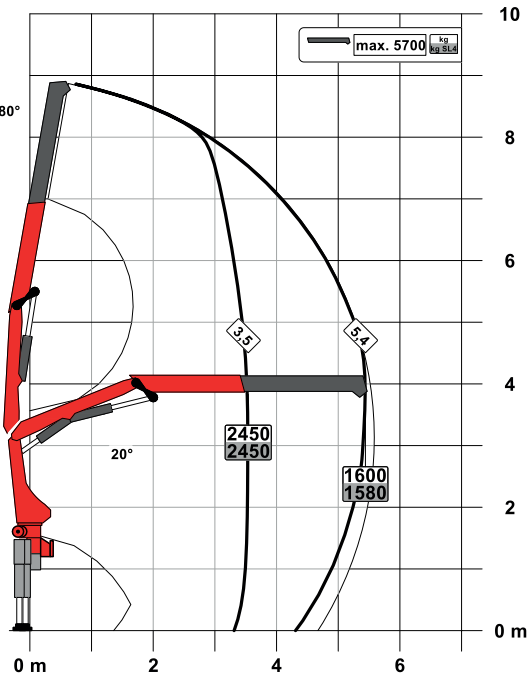


A

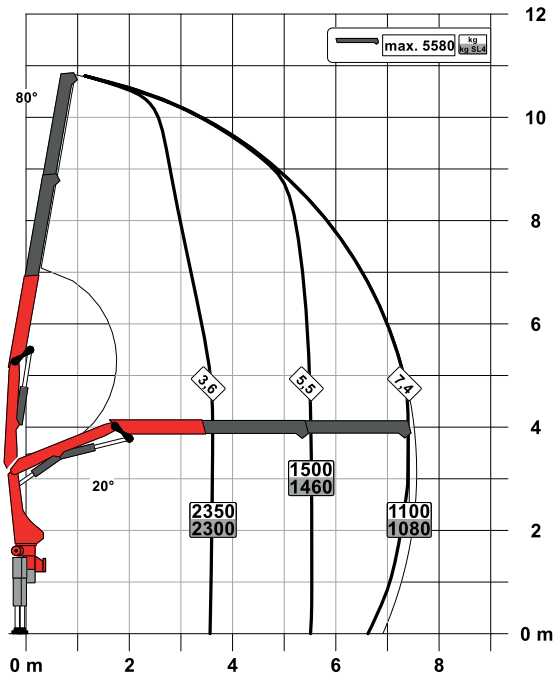

C

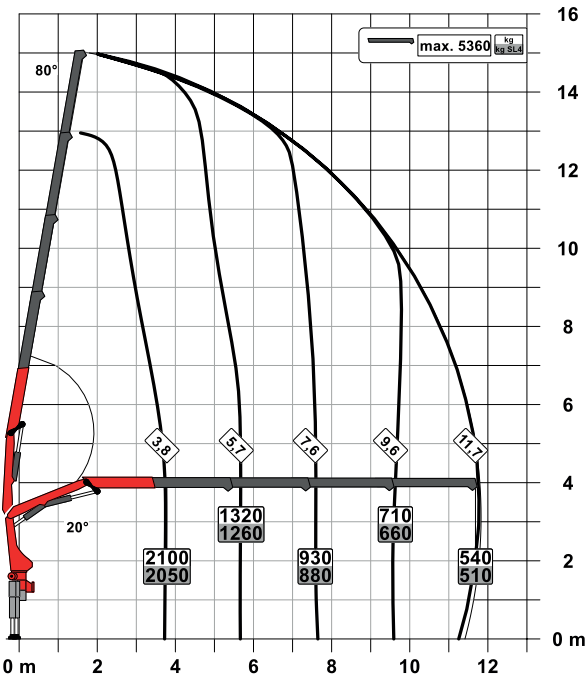

B

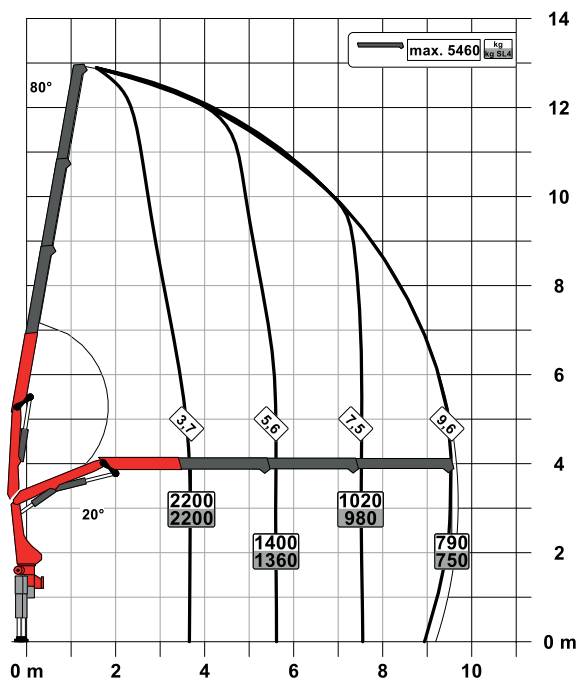

SLD 3 (NON-CE)

- Single Link
- M-HPLS
- Paltronic overload protection
- NON-CE model



Technical specifications

EN 12999 HC1 HD4/S2



Max. lifting moment	8.7 mt/85.3 kNm	62910 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	11.8 m	38' 9"
Max. manual outreach	15.8 m	51' 10"
Slewing angle	400°	
Slewing torque	1.0 mt/9.8 kNm	7230 ft.lb
Stabiliser spread (std./max.)	3.2 m/ 5.6 m	10' 6"/ 18' 4"
Fitting space required (std.)	0.70 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	350 bar	5075 psi
Recommended pump capacity	from 25 l/min to 35 l/min	6.6 US gpm 9.2 US gpm
Dead weight (std.)	1050 kg	2320 lb




PERFECT DIMENSIONS

EXTENSION BOOM VARIATIONS

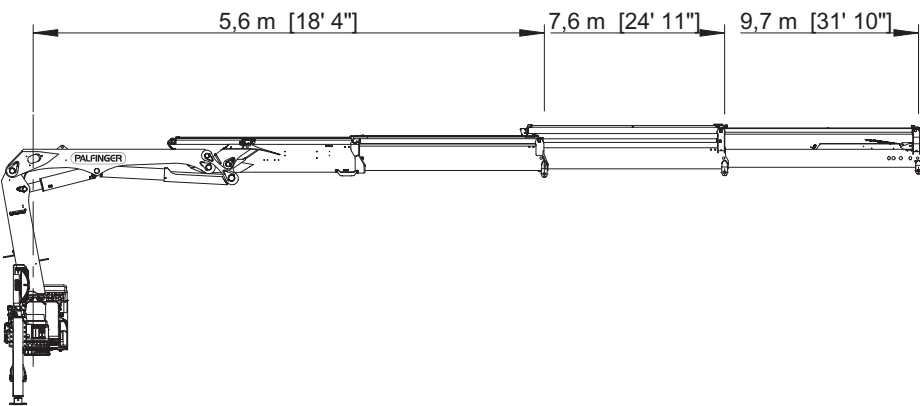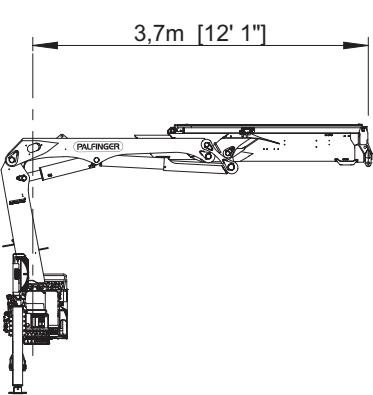


DIMENSIONS

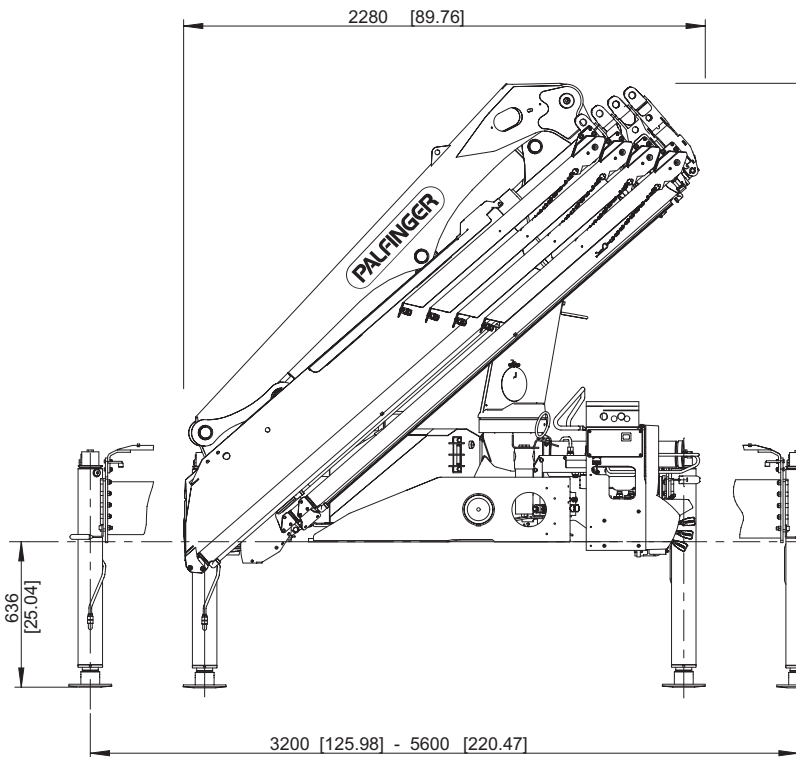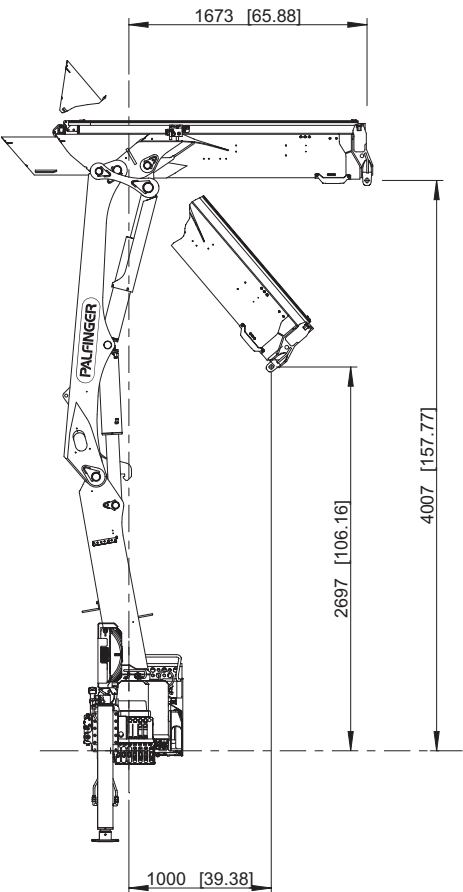

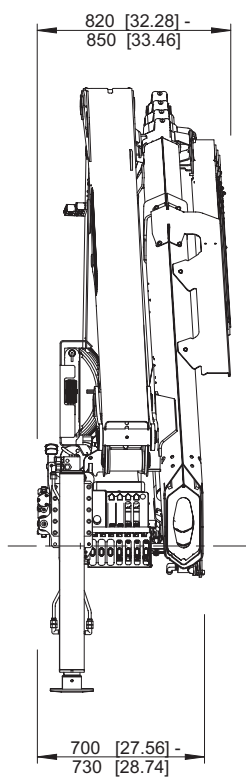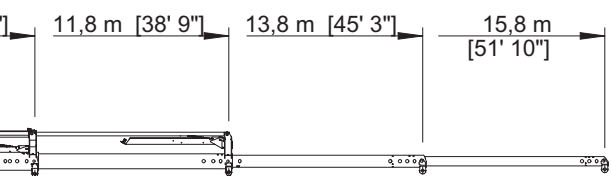


PERFECT DIMENSIONS


STD

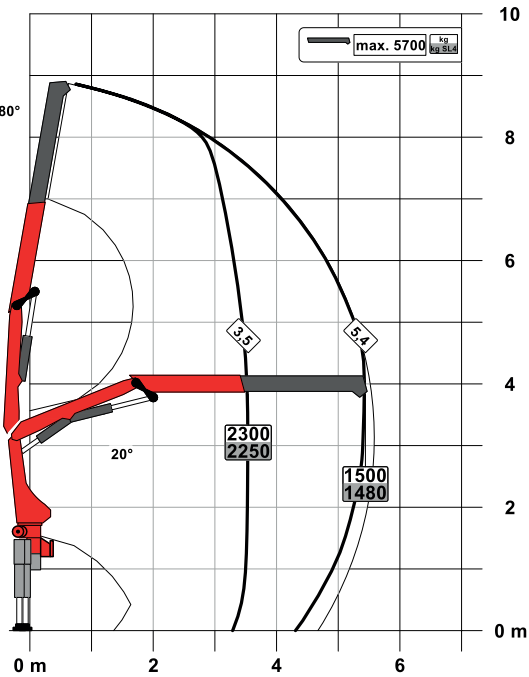


A

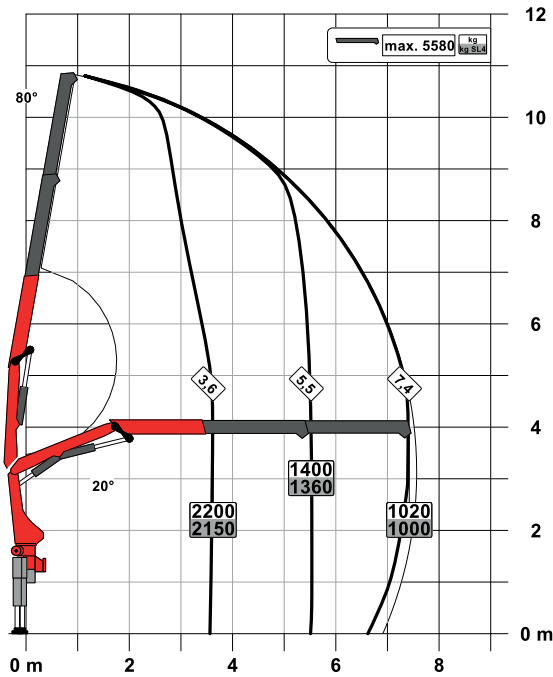

C

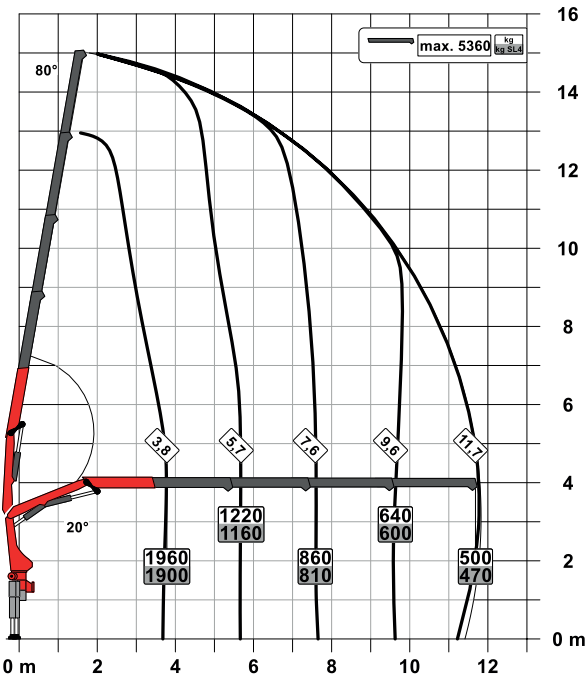

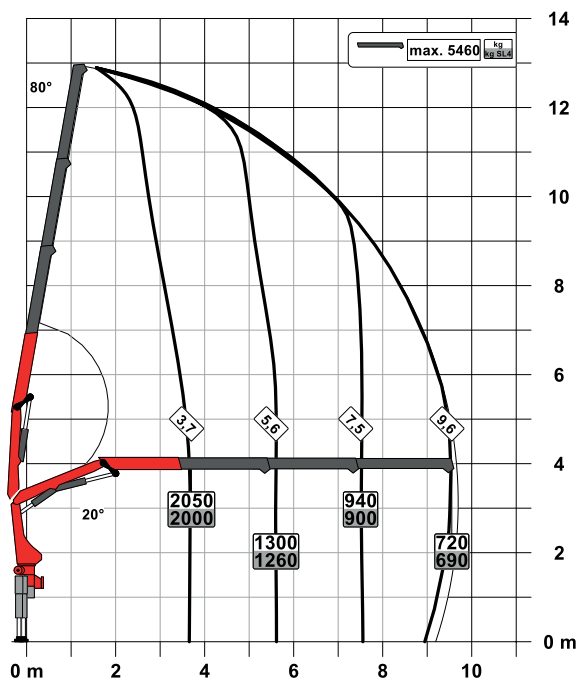B

SLD 3

- Single Link
- Paltronic overload protection
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
 - High stand control
 - Radio remote control
 - Rope winch 1.5t on the knuckle boom
- NON-CE and CE model

Technical specifications


EN 12999 HC1 HD4/S2

Max. lifting moment	8.1 mt/79.6 kNm	58710 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	11.8 m	38' 9"
Max. manual outreach	15.8 m	51' 10"
Slewing angle	400°	
Slewing torque	1.0 mt/9.8 kNm	7230 ft.lb
Stabiliser spread (std./max.)	3.2 m/5.6 m	10' 6"/18' 4"
Fitting space required (std.)	0.70 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	from 25 l/min to 35 l/min	6.6 US gpm to 9.2 US gpm
Dead weight (std.)	1050 kg	2320 lb


PK 9.501 SLD 5

PERFECT DIMENSIONS


STD

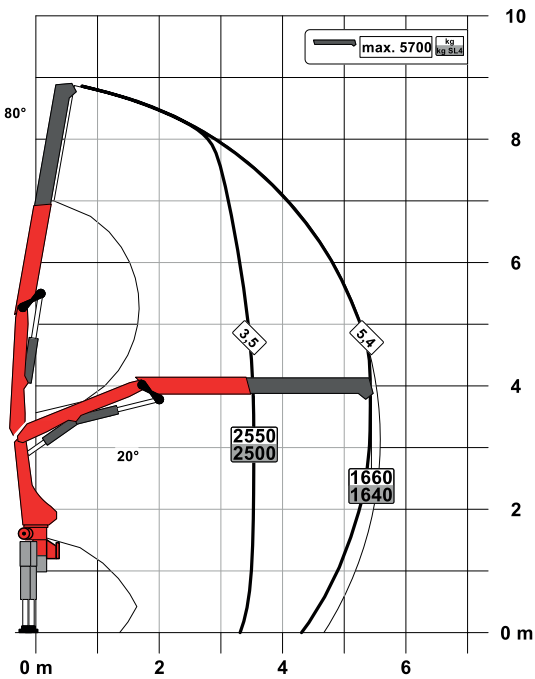


A

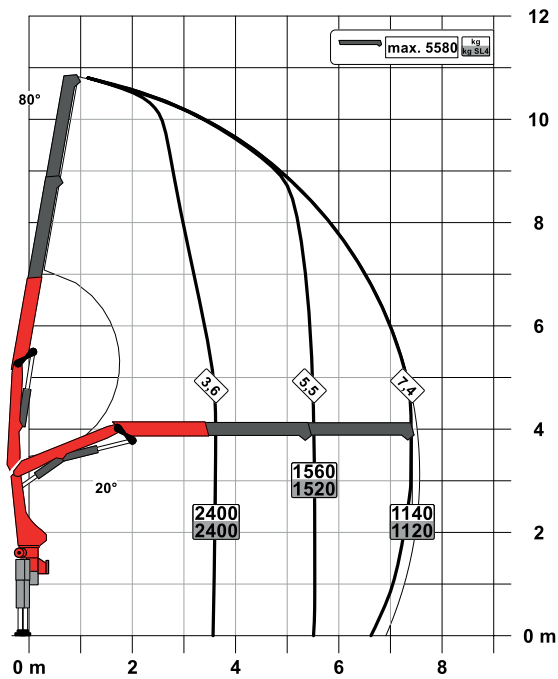

C

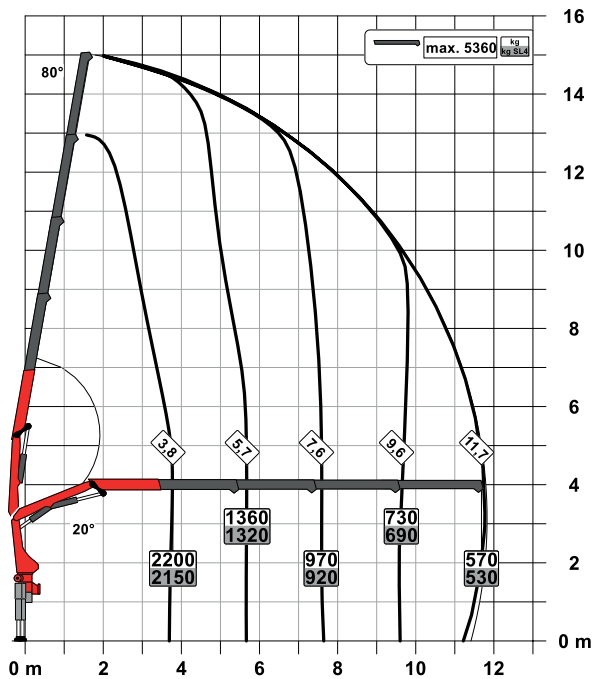

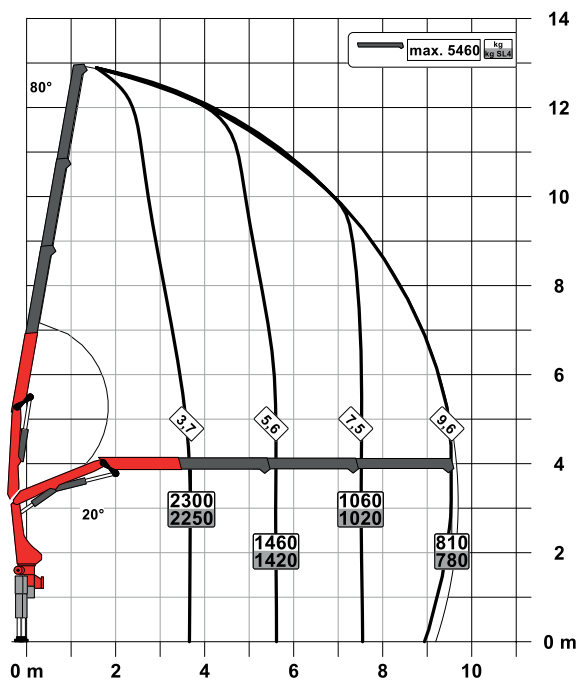B

SLD 5

- Single Link
- Paltronic overload protection
- E-HPLS
- Load Sensing valve
- Radio remote control with LED display
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
 - Rope winch 1.5t on the knuckle boom
- NON-CE and CE model

Technical specifications

EN 12999 HC1 HD4/S2

Max. lifting moment	9.0 mt/88.2 kNm	65050 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	11.8 m	38' 9"
Max. manual outreach	15.8 m	51' 10"
Slewing angle	400°	
Slewing torque	1.0 mt/9.8 kNm	7230 ft.lb
Stabiliser spread (std./max.)	3.2 m/ 5.6 m	10' 6"/ 18' 4"
Fitting space required (std.)	0.70 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	360 bar	5220 psi
Recommended pump capacity	from 40 l/min to 50 l/min	10.6 US gpm 13.2 US gpm
Dead weight (std.)	1080 kg	2380 lb

KP-PK8/9SLDM2+EN

Cranes shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.